

Alcott Area Light

landscapeforms®

Product Data Sheet



The Alcott area light is a contemporary interpretation of a traditional lamppost. Its gently curved posts are topped by a domed energy-efficient LED luminaire sealed with thermoformed lens. Proprietary AWEN optics combined with multiple aiming angles provide directional lighting, reducing light pollution and wasted energy.

General Description

- Offered in 3 standard mounting heights (12', 14', and 16')
- Asymmetrical and symmetrical distribution types available
- Mounting template and anchor hardware included
- Alcott ships completely assembled and ready for installation
- Zero up-light, International Dark-Sky approved
- UL Listed, suitable for wet locations

Electrical

Surge protected 100V-277V 50/60 Hz, Class 2 dimmable driver }
 mounted within integrated cast aluminum base cabinet. LED cartridge with weatherproof quick-disconnect provides ease of serviceability. Alcott ships prewired and fully assembled.

Alcott Type 3

Type 3 Distribution

Structure: Housing, LED cartridge and cabinet are cast aluminum, pole is aluminum extrusion.

CCT: 2700K, 3000K, 3500K, 4000K

Drive Current: 350mA

Optic: AWEN Optic

Lens: Diffused Acrylite®

Power Supply: 100V-277V

Dimmable: 0-10V

BUG Rating: B0 U0 G1

IP Rating: IP66 for LED Cartridge

Alcott Type 5

Type 5 Distribution

Structure: Housing, LED cartridge and cabinet are cast aluminum, pole is aluminum extrusion.

CCT: 2700K, 3000K, 3500K, 4000K

Drive Current: 350mA

Optic: AWEN Optic



Lens: Diffused Acrylite®

Power Supply: 100V-277V

Dimmable: 0-10V

BUG Rating: B3 U0 G1

IP Rating: IP66 for LED Cartridge

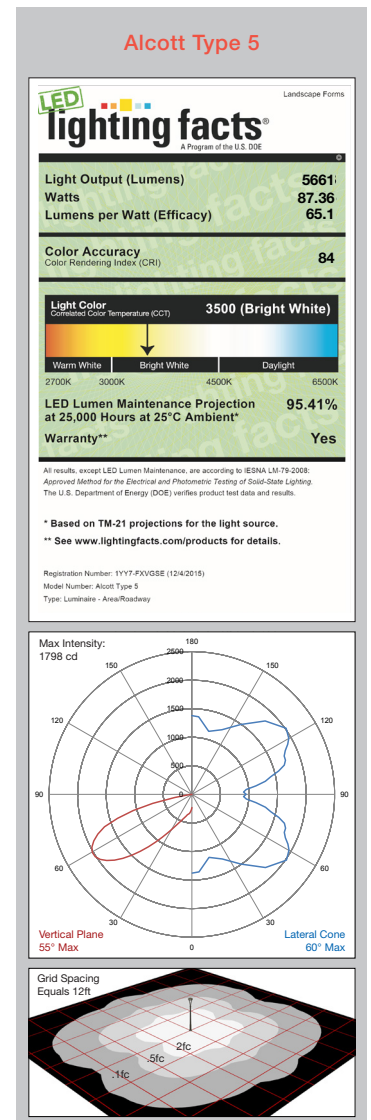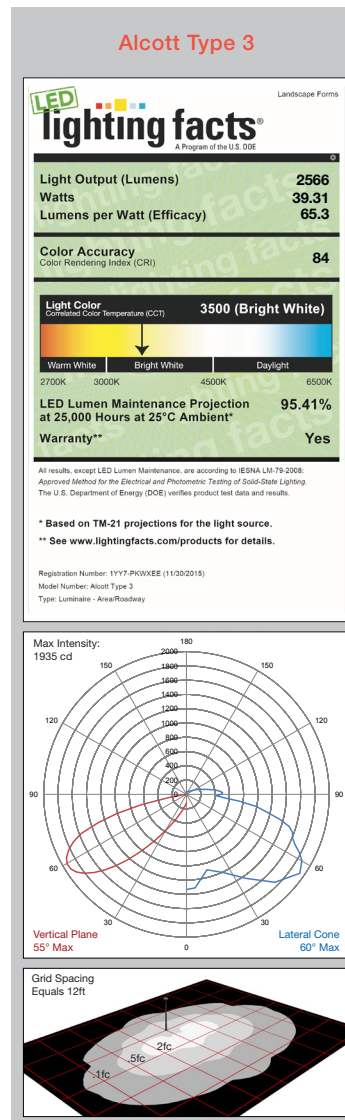

Alcott Area Light

landscapeforms®

Product Data Sheet



Finish

Pangard II®, offered exclusively by Landscape Forms, is a 19 step program of cleaning, priming, and powdercoating that resists rusting, chipping, peeling and fading to produce the finest metal finish available for site furniture and outdoor lighting. In addition, Pangard II® contains no heavy metals and is free of Hazardous Air Pollutants.

To Order

Specify: Product, Lamp, Drive Current, Color Temperature, Input Voltage, Mounting Height, and Powdercoat Color.

Product	Lamp	Drive Current	Color Temp.	Input Voltage	Mounting
AC Alcott	048L3 (48 LED, Type 3)	035F (350 mA)	40K (4000K)	UV1 (100-277VAC)	12 (144in)
	096L5 (96 LED, Type 5)		35K (3500K)		14 (168in)
			30K (3000K)		16 (192in)
			27K (2700K)		

EXAMPLE: AC – 048L3 – 035F – 35K – UV1 – 12 – Powdercoat Color

Product Modifications

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Contact your local Landscape Forms representative to learn more about these offerings.

Warranty

LED lighting products are warranted for six years.


Other

UL Listed, CE, RoHS Compliant, Dark-Sky Approved, US Patent Pending



Alcott is designed by Robert A.M. Stern Architects

[Click here](#) for patent information related to this product.

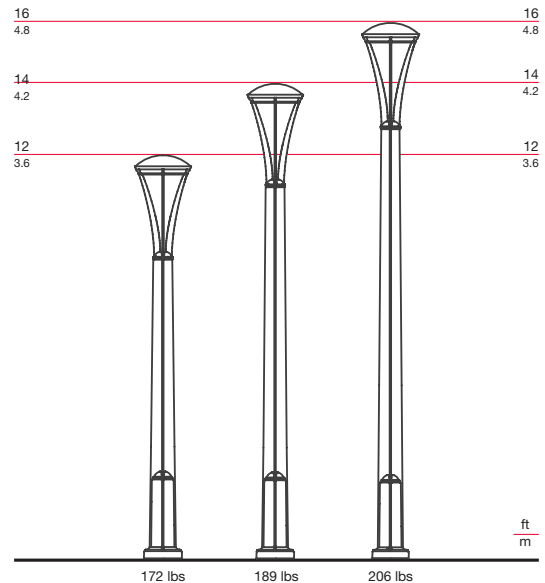

Visit landscapeforms.com for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level. ©2022 Landscape Forms, Inc. Printed in U.S.A. All Rights Reserved.

landscapeforms.com | specify@landscapeforms.com