

# Ashbery Path Light

landscapeforms®

## Product Data Sheet



Ashbery is a trio of lights that brings together advanced LED technology and optics with an homage to traditional-style lights that have a special place in the American lexicon. The pathway light is 3' tall, and is ideal for illuminating footpaths for safety and extended use. Cast aluminum parts in a full color palette are finished with Landscape Forms proprietary Pangard II® HAPS, VOC, lead-free polyester powdercoat.

### General Description

- Cast aluminum LED cartridge and structure
- Surface mounted; base plate mounting template included
- Asymmetrical and symmetrical distribution types available
- Zero up-light, International Dark-Sky approved
- UL Listed, suitable for wet locations

### Electrical

Surge protected 100V-277V 50/60 Hz, Class 2 driver. LED cartridge with weatherproof quick disconnect provides ease of installation and serviceability. Ashbery ships prewired.

### Path Light Type 4

#### Type 4 Distribution

CCT: 2700K, 3000K, 3500K, 4000K

Drive Current: 350mA

Optic: Khatod Collimators

Lens: Diffused Acrylite®

Power Supply: 100V-277V LED

LED Driver: 12W

BUG Rating: B0 U0 G1

IP Rating: IP66 for LED Cartridge

Weight: 30 lbs

### Path Light Type 5

#### Type 5 Distribution

CCT: 2700K, 3000K, 3500K, 4000K

Drive Current: 350mA

Optic: Khatod Collimators

Lens: Diffused Acrylite®

Power Supply: 100V-277V LED

LED Driver: 20W

BUG Rating: B1 U0 G1

IP Rating: IP66 for LED Cartridge

Weight: 30 lbs

#### Ashbery Path Light Type 4

**Light Output (Lumens)** 590  
**Watts** 8.9  
**Lumens per Watt (Efficacy)** 74.48

**Color Accuracy** 84  
Color Rendering Index (CRI)

**Light Color** 3500 (Bright White)  
Correlated Color Temperature (CCT)

**LED Lumen Maintenance Projection** 96.11%  
at 50,000 Hours at 25°C Ambient\*

**Warranty\*\*** Yes

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

\* Based on TM-21 projections for the light source.  
\*\* See [www.lightingfacts.com/products](http://www.lightingfacts.com/products) for details.

Registration Number: 1Y17-5L053F (6/16/2016)  
Model Number: Ashbery Path Light Type 4  
Type: Luminaire - Bolted

#### Ashbery Path Light Type 5

**Light Output (Lumens)** 1063  
**Watts** 14  
**Lumens per Watt (Efficacy)** 78.1

**Color Accuracy** 84  
Color Rendering Index (CRI)

**Light Color** 3500 (Bright White)  
Correlated Color Temperature (CCT)

**LED Lumen Maintenance Projection** 96.11%  
at 50,000 Hours at 25°C Ambient\*

**Warranty\*\*** Yes

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

\* Based on TM-21 projections for the light source.  
\*\* See [www.lightingfacts.com/products](http://www.lightingfacts.com/products) for details.

Registration Number: 1Y17-0BEVE2J (6/16/2016)  
Model Number: Ashbery Path Light Type 5  
Type: Luminaire - Area/Roadway

# Ashbery Path Light

landscapeforms®

## Product Data Sheet



### Finish

Pangard II®, offered exclusively by Landscape Forms, is a 19 step program of cleaning, priming, and powdercoating that resists rusting, chipping, peeling and fading to produce the finest metal finish available for site furniture and outdoor lighting. In addition, Pangard II® contains no heavy metals and is free of Hazardous Air Pollutants.

### To Order

Specify: Product, Lamp, Drive Current, Color Temperature, Input Voltage, Mounting Option, and Powdercoat Color.

Product	Lamp	Drive Current	Color Temp.	Input Voltage	Mounting
AP ASHBERY	006L4 (6 LED, Type 4)	035F (350 mA)	40K (4000K)	UV1 (100-277VAC)	SM (Surface Mount)
	012L5 (12 LED, Type 5)		35K (3500K)		
			30K (3000K)		
			27K (2700K)		

EXAMPLE: AP – 006L4 – 035F – 35K – UV1 – SM – Powdercoat Color

### Product Modifications

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Contact your local Landscape Forms representative to learn more about these offerings.

### Warranty

LED lighting products are warranted for six years.


### Certifications

UL Listed, CE, RoHS Compliant, Dark-Sky Approved



Ashbery is designed by Robert A.M. Stern Architects

[Click here](#) for patent information related to this product.

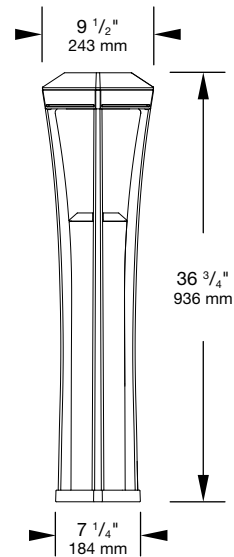

Visit [landscapeforms.com](http://landscapeforms.com) for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level. ©2022 Landscape Forms, Inc. Printed in U.S.A.

[landscapeforms.com](http://landscapeforms.com) | [specify@landscapeforms.com](mailto:specify@landscapeforms.com)