

INSTALLATION:

1. Set unit in position.
2. Attach connecting plates using (2) M16 x 35mm stud bolts per plate.

Note: Full planter has (6) built-in foot pads that are 5-3/4" diameter and 1" tall. When installed on grass or other loose soil, the planter may sink 1". If this is not desired, each foot pad may have a 12" x 12" paver set in place to prevent sinking.

Included components: planter ships in two halves. Includes (2) connecting plates and (4) M16x35mm stud bolts for attaching plates to planter.

Tools required:

- Crane or forklift to move 3748 lbs.
- Wood supports or straps
- 24mm wrench

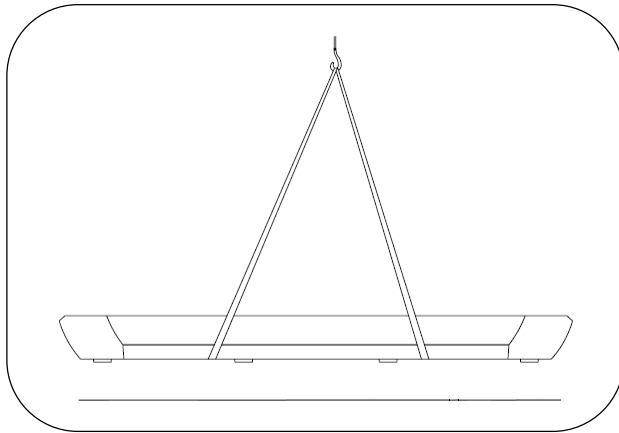


Fig. 1 – Crane install – strap locations

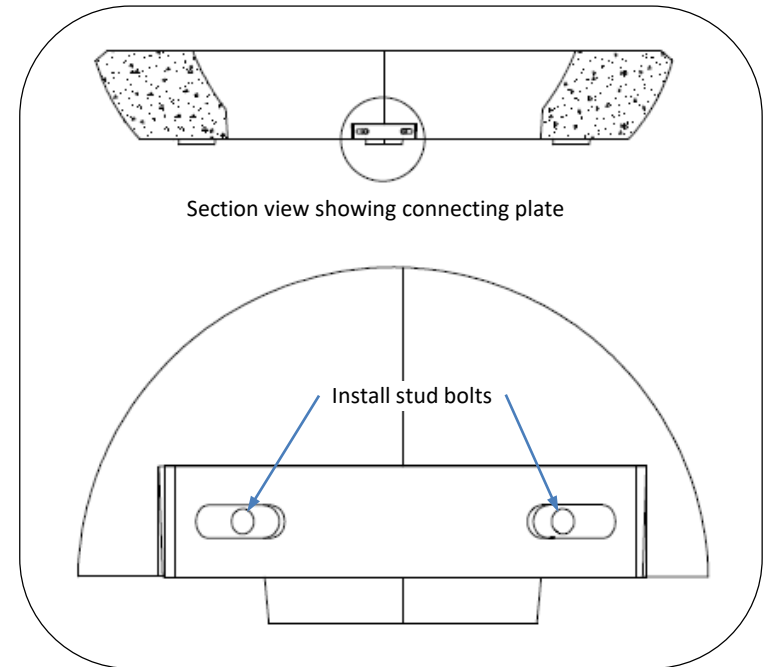


Fig. 2 – shelter hole locations